



the future is safer with altro

altro

New
colours

AltroSmooth Ethos™ Smooth flooring



Light Oak 389-240
WR225 / A1M225 / LRV 39



Argent Oak 389-49
WR17 / A1M20 / LRV 33



Golden Oak 389-21
WR14 / A1M200 / LRV 35



Bay Oak 389-23
WR16 / A1M200 / LRV 18



Blonde Maple 389-205
WR172 / A1M200 / LRV 49



Rich Maple 389-207
WR171 / A1M246 / LRV 21




Flaxen Beech 389-86
WR18 / A1M200 / LRV 33



Honey Beech 389-87
WR19 / A1M200 / LRV 25





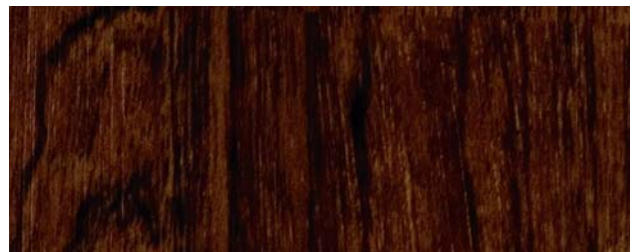











Dark Walnut 389-230
WR227 / A1M227 / LRV 11



Dark Mahogany 389-235
WR160 / A1M160 / LRV 13

A+ BRE Generic Green Guide
Rating for Smooth Flooring,
full details available at
www.thegreenguide.org.uk


Exact material match with samples cannot be guaranteed.

Flooring Type	Decorative PVC smooth vinyl flooring with PU coating		
Areas of Use	Shops, corridors, offices, and circulation areas		
Support Reinforcement	0.1 mm glass fibre reinforcement		
Classification For Use	 	EN 649	31, 32 & 41
Slip Resistance*		DIN 51130	R9
Thickness		EN 428	2.0 mm
Wear Layer		EN 429	0.6 mm
Flexibility		EN435	Pass
Weight		EN 430	3.0 kg/m ²
Roll Dimensions		EN 426	1.82 m x 18 m
Light Fastness		EN 20105-B02	≥6
Wear Resistance		EN 660-2	Group T
Indentation		EN 433	≤0.1 mm
Fire Performance		EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _{fl} s1 ≥8kW/m ² Pass
Chemical Resistance**		EN 423	Good
Castor Chair Abrasion		EN 425	Pass

*For wet areas where bare foot slip resistance is required such as showers and swimming pool surrounds, we recommend the use of Altro Marine™ 20/T20. **Caution Ketone/Aromatic Solvents. Please contact Altro for further technical advice regarding staining and chemical resistance. Contains Biocide.

Installation and Maintenance

All installations in accordance with Altro safety flooring instructions and Local Codes of Practice. Please refer to Altro Cleaning Card for maintenance advice. Failure to install and maintain Altro floors in accordance with installation instructions can affect its performance and slip resistance. Floors should be protected from other trades and thoroughly cleaned before handover.

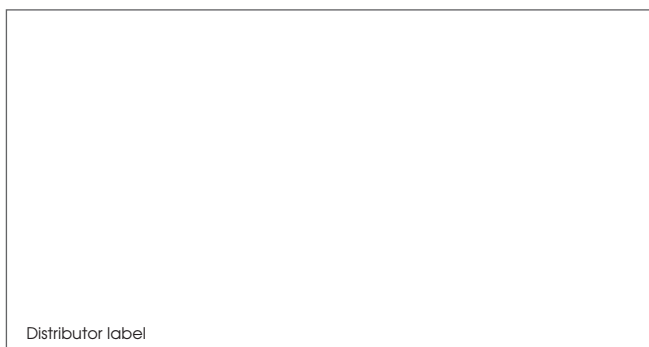

For further technical information please visit www.altro.com

