



Altro is the first safety flooring manufacturer to recycle traditional safety flooring in-house

All Altro safety flooring contains recycled content




altro


the future is safer with altro

Altro Maxis™ 25 contains recycled material


Altro Maxis™ 25 Safety Flooring / Suelos de Seguridad / Sicherheitsbodenbelag




Galaxy MXI25219
WR100 A1M100 LRV 6




Universe MXI25209
WR84 A1M84 LRV 22




Summit MXD25206
WR81 A1M81 LRV 26




Calibre MXD25201
WR72 A1M72 LRV 10




Legend MXD25215
WR231 A1M73 LRV 10




Vanquish MXI25211
WR173 A1M71 LRV 22




Fusion MXI25208
WR83 A1M83 LRV 14




Pinnacle MXD25204
WR52 A1M52 LRV 25




Valiant MXI25218
WR243 A1M147 LRV 14




Epic MXI25212
WR105 A1M1 LRV 64




Sovereign MXD25214
WR157 A1M42 LRV 11




Meridian MXI25216
WR63 A1M239 LRV 22



Merit MXD25207
WR20 A1M20 LRV 40



Enterprise MXI25220
WR12 A1M12 LRV 51





















Endeavour MXI25210
WR27 A1M27 LRV 29

Light Reflectance Values (LRV) are measured in accordance with BS8493:2008

Exact Material Match with samples cannot be guaranteed

No podemos garantizar que el material del suelo de seguridad coincida exactamente con el de las muestras.

Eine exakte Übereinstimmung des Materials mit Mustern kann nicht garantiert werden

| | | | |
|--|---|---|---|
| Flooring Type Tipo de pavimento Belagsart |  | EN 13845/ EN 13553 | Safety flooring Suelo de seguridad antideslizante Sicherheitsbodenbelag |
| Classification For Use Areas de uso Einsatzbereiche |  | EN 685 | 34 & 43 34 y 43 34 & 43 |
| Slip Resistance Resistencia al deslizamiento Rutschsicherheit* |  | TRRL EN 13845 EN 13893 DIN 51130 | > 36 ESf DS R10 |
| Thickness Espesor Total Gesamtdicke |  | EN 428 | 2.5 mm |
| Wear Layer Capa de uso Nutzschicht |  | EN 429 | 2.5mm |
| Flexibility Flexibilidad Flexibilität |  | EN 435 | Pass Conforme bestanden |
| Weight Peso Flächengewicht |  | EN 430 | 3.1 kg/m ² |
| Roll Dimensions Dimensiones del rollo Rollenabmessungen |  | EN 426 | 2 m x 20 m = 40 m ² |
| Light Fastness Resistencia a la luz Lichtechtheit |  | EN 20105-B02 | >6 |
| Sound Insulation Aislamiento acústico Trittschal |  | ISO 140-8 | 7 dB |
| Wear Resistance Abrasión Verschleißverhalten |  | EN13845 | <10% particles lost over 50000 Cycles <10% de las partículas perdidas en 50.000 ciclos <10% Partikel werden über 50000 Umdrehungen verloren |
| Indentation Punzonamiento Resteindruck |  | EN 433 | < 0.10mm |
| Fire Performance Reacción al fuego Brandverhalten |  | EN 13501-1 EN ISO 9239-1 EN ISO 11925-2 | Class Bfl-s1 >8kW/m ² Pass Clase Bfl-s1 >8kW/m ² Conforme Klasse Bfl-s1 >8kw/m ² , bestanden |
| Chemical Resistance Resistencia a los productos químicos Chemikalieneinwirkung** |  | EN 423 | Good Buena beständig |
| Castor Chair Abrasion Huellas de sillas de ruedas Stuhlrollenbeanspruchung |  | EN 425 | Pass Conforme geeignet |
| Under Floor Heating Calefacción por el suelo Fußbodenheizung |  | EN 12667 | Suitable Apto geeignet |
| Electrical Behaviours Características eléctricas Elektrisches Verhalten |  | EN1815 | < 2 kV Antistatic < 2 kV Antiestáticas < 2 kV antistatisch |
| VOC Emissions Emisiones de VOC VOC Emissionen |  | prEN 15052 Section 01350 AgBB/DiBt | Low/Pass/Approved Baja/Conforme/Aprobado gering/geeignet/zugelassen |


*For wet areas where barefoot slip resistance is required such as showers and swimming pool surrounds see Altro Marine™ 20/T20. Please also refer to local building regulations/codes of practice.

** Caution Ketone/Aromatic Solvents. Please contact Altro for further technical advice regarding staining and chemical resistance.

Contains Biocide.

Installation and Maintenance

All installations in accordance with Altro safety flooring instructions and Local Codes of Practice. Please refer to Altro Cleaning Card for maintenance advice. Failure to install and maintain Altro floors in accordance with installation instructions can affect its performance and slip resistance. Floors should be protected from other trades and thoroughly cleaned before handover.

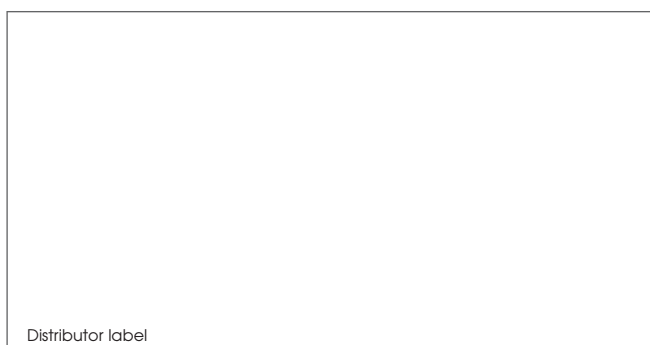

For further technical information please visit www.altro.com

Si desea obtener más información técnica, visite www.altroscandess.es

Weitere technische Informationen finden Sie auf unserer Website www.altro.de

