



altro

the future is safer with altro

Altro Whiterock Quickclad™ PVC wall cladding to quarry tile floor detail

typical specification (Ref: QWF6)


system 2 – off wall detail

JULY 2011

Altro Whiterock Quickclad rigid PVC foam sheets fixed to a galvanised steel stud framework system, consisting of head and sill channels (Ref: AGL8) and vertical studs (Ref: AGL1) fixed with wafer head screws (Ref: 611). Vertical studs fixed at maximum 600mm centres.

The void between substrate and back of panel can be adjusted using fixing brackets (Ref AGL9) attached to the vertical metal supports. Fixing brackets will

accommodate a void up to maximum of 200mm. Brackets should be positioned at nominal 1000mm centres. To provide a suitable substrate for the quarry tile skirting, fix 9mm WBP resin bonded plywood to the vertical metal studs with 25mm x No 6 Posidrive self tapping hard point screws. Apply Altro silicone sealant (Ref: A802) at the junction of PVC cladding and skirting.

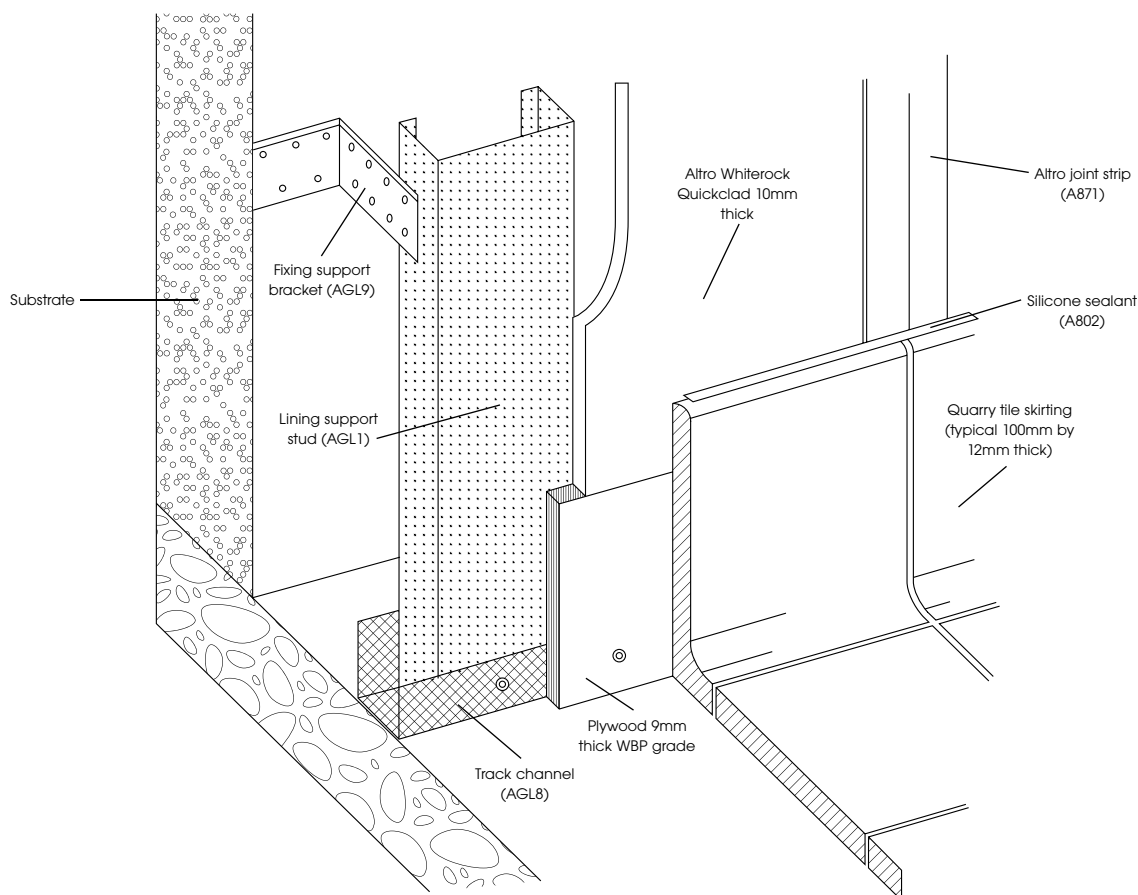

for further information or technical advice

tel: 01462 707600 fax: 01462 707504

e-mail enquiries@altro.com or explore www.altro.com