



altro

installation techniques and detailing


self-coved to architrave

MARCH 2005

For locations where a flush finish with no exposed edges is required to an upright such as a door architrave, a CF38R/CF20R radius cove former should be trimmed diagonally back from approx. 200mm – 300mm to a point, then fitted to the junction of the wall and floor. The Altro sheet flooring should be coved over this section

up to a minimum height of 100mm and finished into the required finishing strip. The cove former, Altro flooring and finishing strip (if appropriate) used in this section must be adhered with AltroFix 25NF contact adhesive. All mitres and joints within the coving must be hot welded.

Drawing Ref. D9/03/05

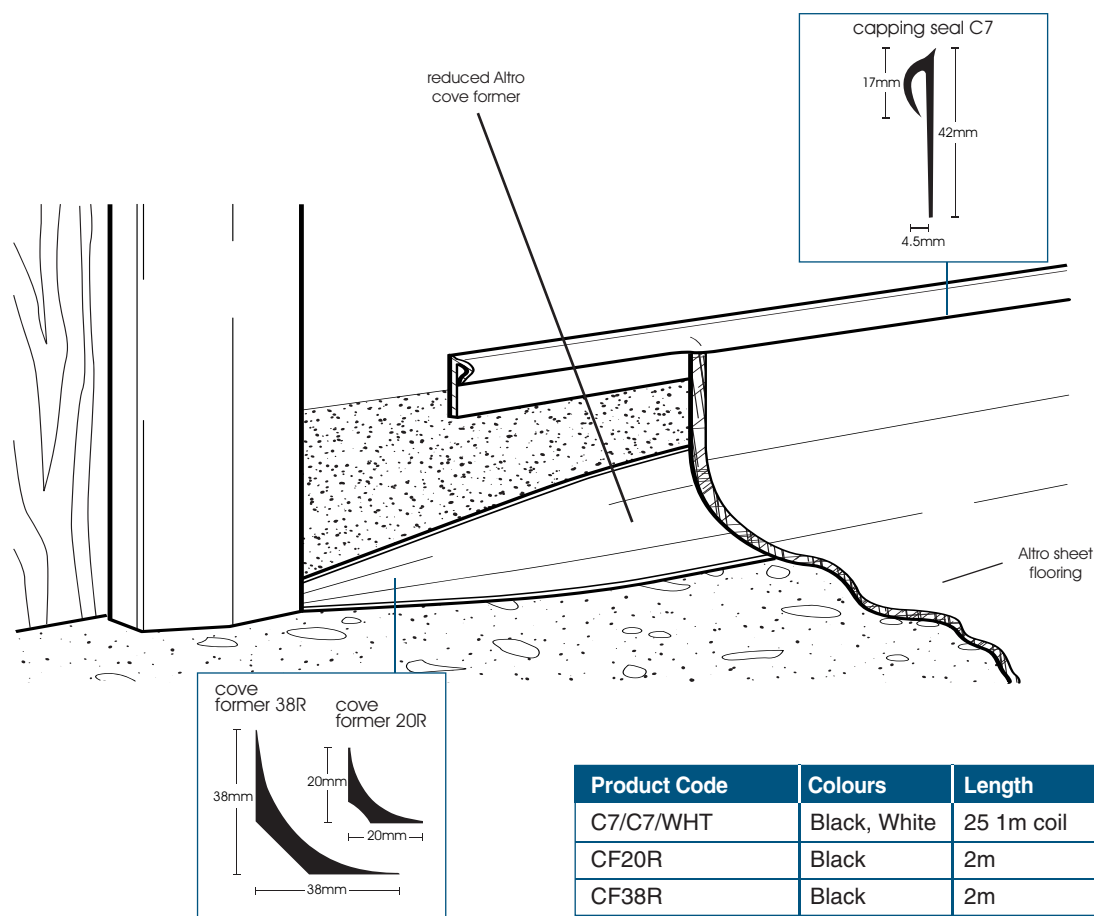

Product Code	Colours	Length
C7/C7/WHT	Black, White	25 1m coil
CF20R	Black	2m
CF38R	Black	2m

for further information or technical advice

tel: 01462 707600 fax: 01462 707515

e-mail enquiries@altro.com or explore www.altro.com