



altro

# installation techniques and detailing


finished to gully angle

MARCH 2005

For locations where sheet vinyl flooring must be finished flush to an existing gully channel or to act as a transition strip to another floor surface and form a water tight seal. A 4mm x 25mm deep channel should be cut at the junction and an Altro Gully Angle GA25/GA35 bedded into and secured with Altrofix 19 water resistant adhesive.

The Gully Angle is reversible with different thickness to suit different floor thickness. The Gully Angle should be sealed to the gully edge with AltroMastic 100. The sheet flooring should be cut in, grooved and hot welded to the Gully Angle.

**Drawing Ref. D10/03/05**

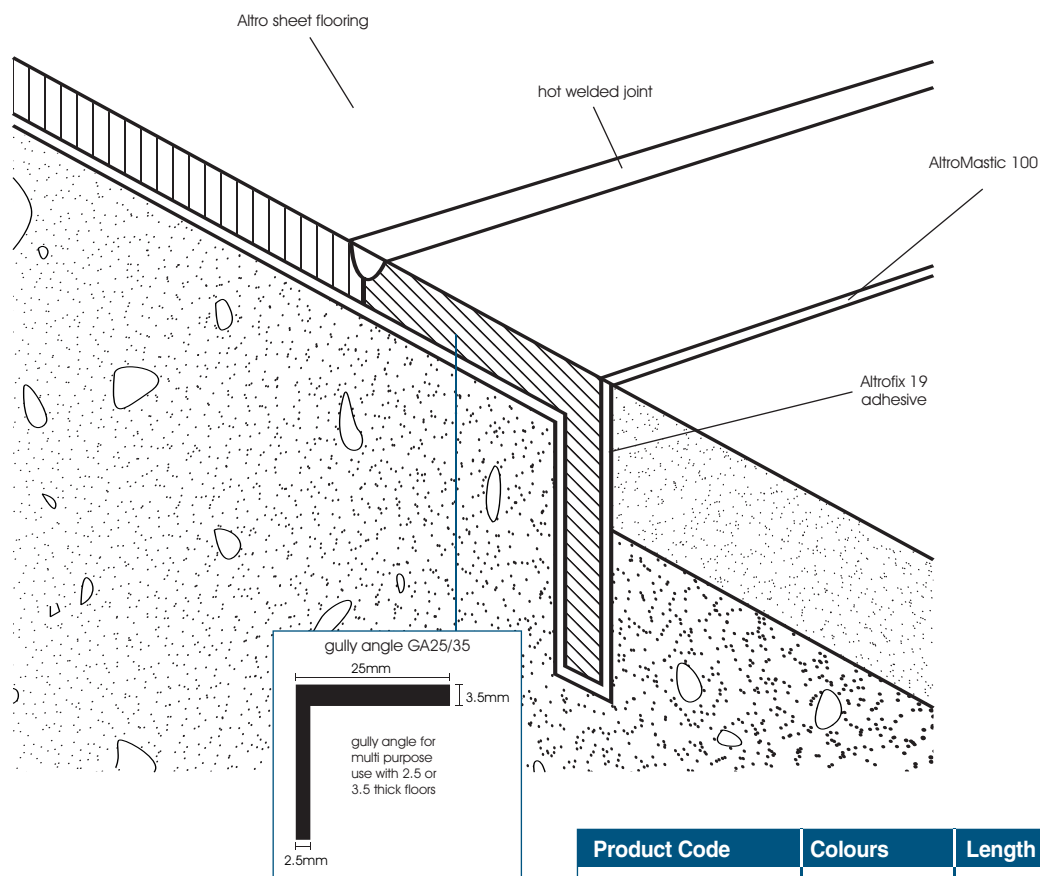

for further information or technical advice

tel: 01462 707600 fax: 01462 707515

e-mail [enquiries@altro.com](mailto:enquiries@altro.com) or explore [www.altro.com](http://www.altro.com)